




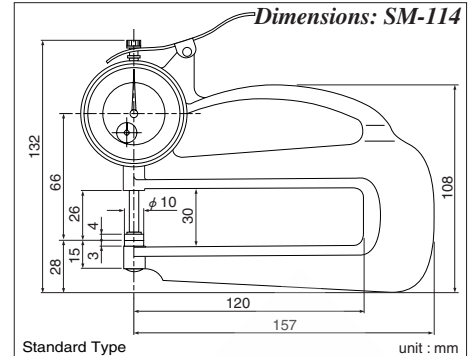


THICKNESS GAUGES



SM-114
Graduation 0.01mm
Measuring Range 10mm

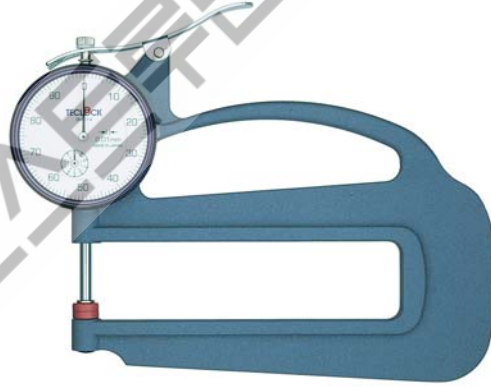


SM-123
Graduation 0.01mm
Measuring Range 20mm

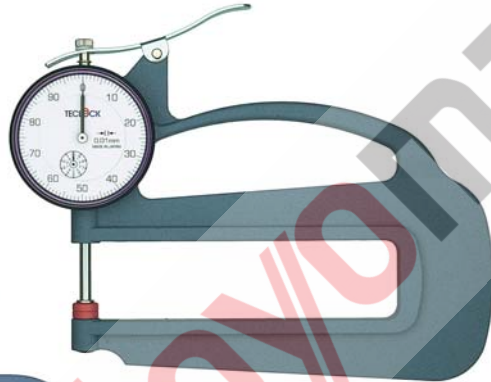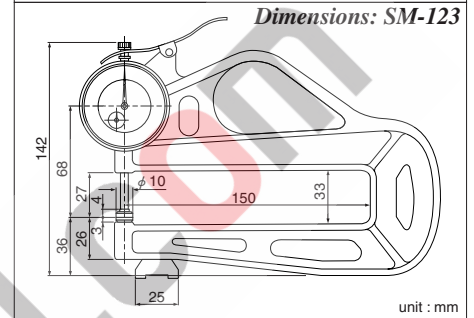

SM-124
Graduation 0.01mm
Measuring Range 20mm

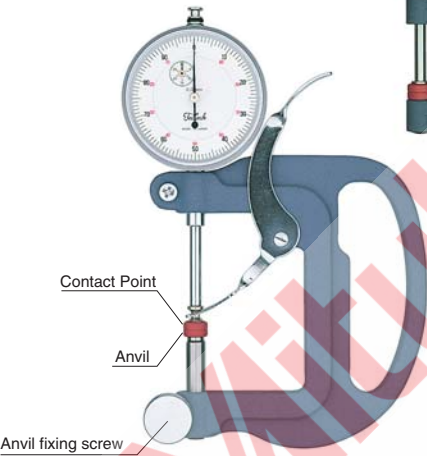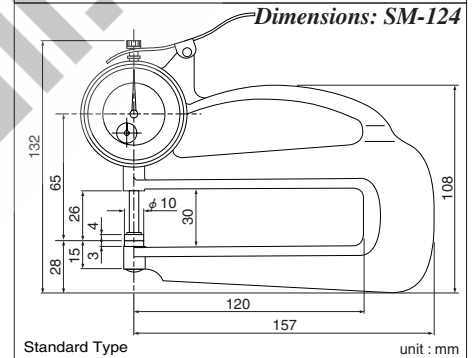

SM-130
Graduation 0.01mm
Measuring Range 50mm
Indication Range 30mm
(Lifting of anvil)
Upward Shockproof

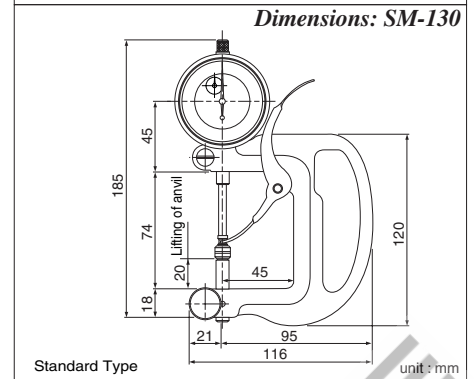

Specifications

SM-114 SERIES

Model	Graduation (mm)	Measuring Range (mm)	Accuracy (μm)	Parallelism (μm)	Dial Reading	Measuring Force (N)	Contact point form (mm)	Anvil form (mm)	Weight (g)
SM-114	0.01	10	15	5	0-50-100	2.5 or less	φ 10 Flat	φ 10 Flat	270
SM-114LS	0.01	10	15	—	0-50-100	2.5 or less	φ 3.2 Ball	φ 10 Flat	270
SM-114LW	0.01	10	15	—	0-50-100	2.5 or less	φ 3.2 Ball	φ 3.2 Ball	270
SM-114P	0.01	10	15	5	0-0.5-1	2.5 or less	φ 10 Flat	φ 10 Flat	270

SM-123

SM-123	0.01	20	20	5	±0-50-100	3.5 or less	φ 10 Flat	φ 10 Flat	440
--------	------	----	----	---	-----------	-------------	-----------	-----------	-----

SM-124 SERIES

SM-124	0.01	20	20	5	0-50-100	3.5 or less	φ 10 Flat	φ 10 Flat	270
SM-124LS	0.01	20	20	—	0-50-100	3.5 or less	φ 3.2 Ball	φ 10 Flat	270
SM-124LW	0.01	20	20	—	0-50-100	3.5 or less	φ 3.2 Ball	φ 3.2 Ball	270

SM-130 SERIES

SM-130	0.01	50	25	5	±0-50-100	2.2 or less	φ 10 Flat	φ 10 Flat	620
SM-130LS	0.01	50	25	—	±0-50-100	2.2 or less	φ 3.2 Ball	φ 10 Flat	620
SM-130LW	0.01	50	25	—	±0-50-100	2.2 or less	φ 3.2 Ball	φ 3.2 Ball	620